



Flexible with Base Plate

pittman[®]

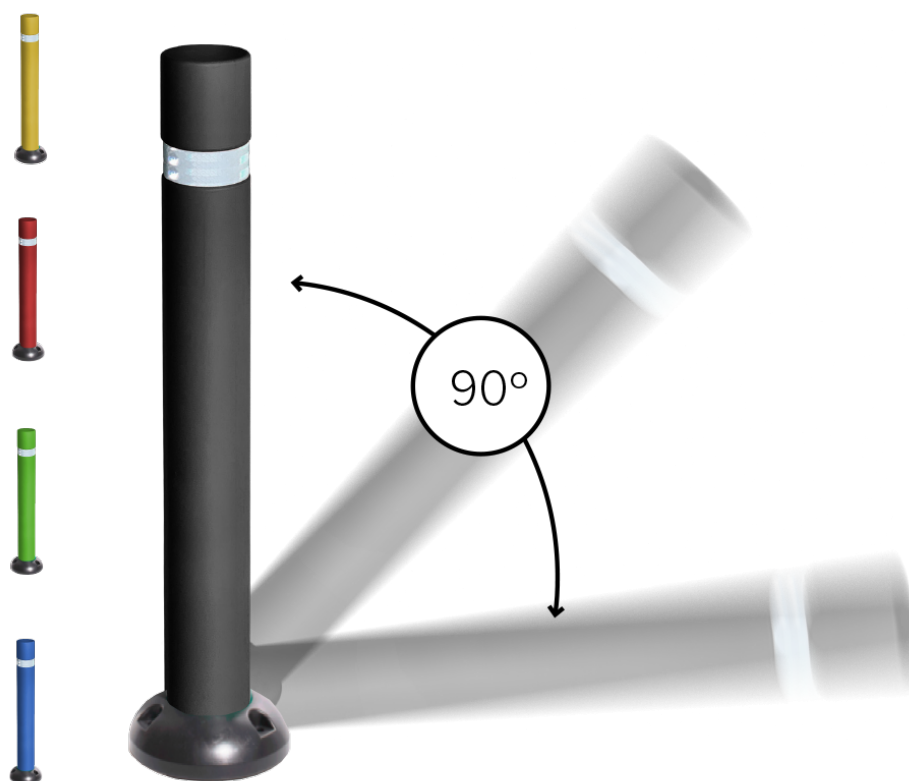

Bollard made of flexible black polyurethane resistant to UV rays with reflective band. With base plate for a bolt-on installation
Manufactured in fixed and removable version with polyurethane or stainless steel base. Exceeds a flexion of 1500 cycles at 45° and 50 cycles at 90°, without damage.
Class "E" in terms of fire behaviour according to the UNE-EN 13501-1:2007+A1:2010 standard.
Resistant to -50° according to the UNE ISO 812 standard.





Ref.	Ø A	H	H1
HflexP	100	810	Ø195

Recommended anchoring: by means of three Ø10 x 120mm bolts depending on the surface.
Optional:
- Other colours: red, green, yellow or blue.




ALTERNATIVES:

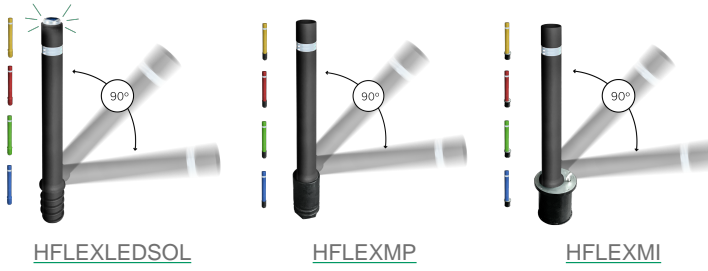

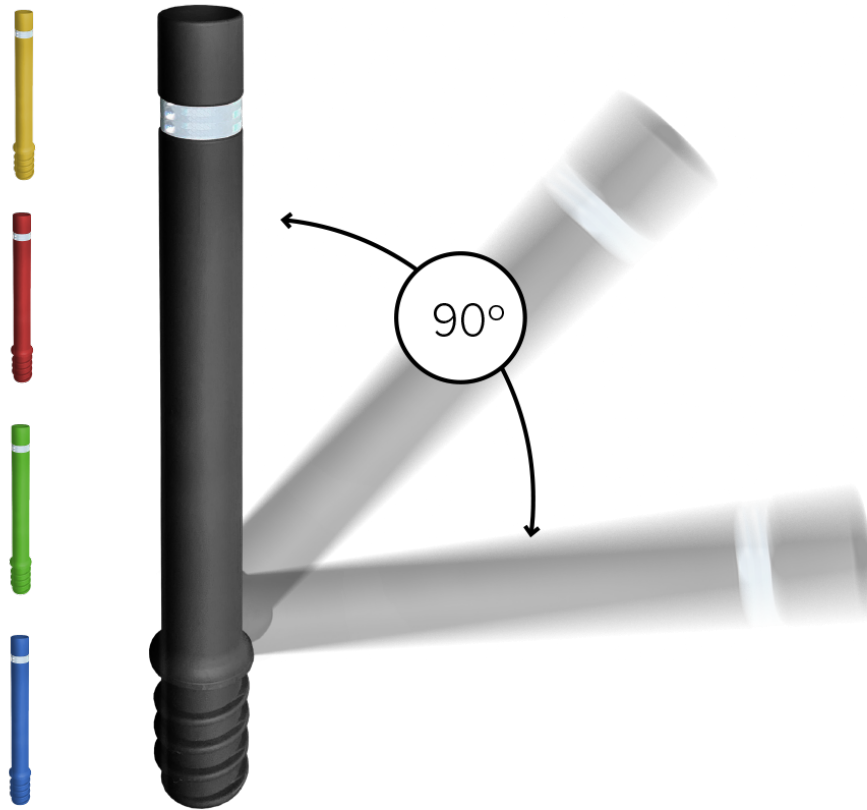

Bollard made of flexible black polyurethane, resistant to UV rays, with reflective band.
 Manufactured in fixed and removable version with polyurethane or stainless steel base.
 Exceeds a flexion of 1500 cycles at 45° and 50 cycles at 90°, without damage.
 Class "E" in terms of fire behaviour according to the UNE-EN 13501-1:2007+A1:2010 standard.
 Resistant to -50° according to the UNE ISO 812 standard.



Ref.	Ø A	H	H1
Hflex	100	1000	190



Recommended anchoring: embedded.
Optional:
- Other colours: red, green, yellow or blue.



ALTERNATIVES:

