
751 Rib'n'Roll™ 6 mm fine rib





- Fine rib rubber profile runner of 6 mm thickness.
- Matting with excellent wear and tear resistance. Used as flooring, shelve liners and in all kinds of industrial applications in workshops, near machines and any place where objects may tend to slide on workbenches, carts, cars or lorry booths. Withstand diluted acids and alkalis.

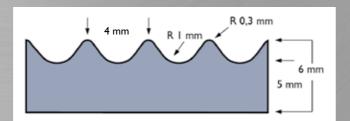

751 Rib'n'Roll™ 6 mm fine rib

	PRO	DUCT SPECIFICATIONS	
Designation	Grooved Matting		
Туре	Flooring / runner		
Description	Corrugated fine rib pattern surface		
Material	Synthetic rubber		
Process	Calendering		
Category	Grooved pattern		
Recommended use	Factory and warehouse premises or any kind of industrial applications to protect floors and materials.		
Colours	Black		
Weight	8.1 kg/m ²		
Thickness	6 mm		
Standard sizes	100 cm x 10 m		
Custom sizes	N/A		
Special remarks	Per linear meter		
		PRODUCT TESTING	
	Tests	Norms	Results
Compression deflection		U.S.	
	1.4 kg/cm ²		
	2.8 kg/cm ²		
Foam battery		ASTM D3574	
Abrasion resistance		ASTM D3884-01	
	500 Cycles		
	5000 Cycles		0.2% weight loss
Static coefficient of friction		ASTM C1028-96	0,73
Elongation		DIN53504	250%
Breaking load		ASTM D412	
Tensile strength		DIN 53504	3.5 MPA
Hardness		DIN 53505	60 Shore A
Anti-slip		DIN 51130 and BG-RULE BGR	181
		FIRE TESTING	
	Critical radiant flux	ASTM E-648	
	Fire retardancy	DIN4102	
		EN 13501-1	
	Flammability test	ASTM D2859	
	Classification of the reaction to fire reaction		M3
ESD		ANSI ESD S7.1 50% Humidity	
Sustainability		Recyclable material Reach Compliant (Registration, Evaluation, Authorization and Restriction of Chemicals	





www.pittman.ie Phone: 01 531 2777