

556 Cushion Ease S

Heavy duty modular rubber tiles



Ergonomic, Anti-fatigue & Safety Matting - Dry Areas Modular Matting 556 Cushion Ease Solid™

Ergonomic benefit derived from a 19 mm thick worker platform with a closed anti-slip pebble structure surface for maximum anti-fatigue comfort in dry industrial environments.

- Heavy duty rubber tiles can be easily assembled for coverage of large areas or individual workstations, wall-to-wall or as islands
- 100% natural rubber compound
- Compatible with patented MD Ramp System™ for smart safety beveling solutions; allows outside and inside corners

Recommended use

- Dry Areas
- For placement in manufacturing plants, assembly lines, picking, packing and logistics warehouses, individual work stations.
- Heavy duty

Colors:


- Black

Sizes:

- 91cm x 91cm
- per m2

Accessories:

- 552 MD-X Ramp System™ Nitrile
- INS Installation Service Available on Request
- 651 M.D. Fire Retardant Ramp System
- 551 MD Ramp System™ Nitrile

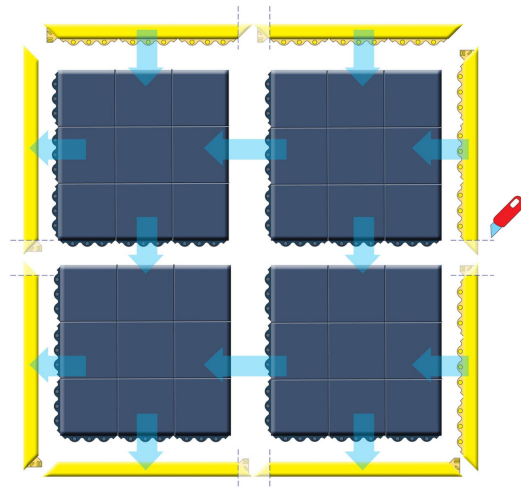

Ergonomic, Anti-fatigue & Safety Matting - Dry Areas Modular Matting Cushion Ease Solid™

General

Brand	Notrax
Category	Dry Areas Modular Matting
Product Number	556
Product Family	Industrial & Commercial Matting
Product Group	Ergonomic, Anti-fatigue & Safety Matting
Product Name	Cushion Ease Solid™
Recommended use	For placement in manufacturing plants, assembly lines, picking, packing and logistics warehouses, individual work stations.
Series	Cushion-Ease®
Shipping Location	Achterzeedijk 57, Unit 15, Barendrecht 2992SB, The Netherlands, Chicago, IL 60638, United States
Type	Dry Areas - Heavy Duty Modular Rubber Mats
Update trigger	20210310-1301
Usage Intensity	Heavy duty

Sustainability

REACH	Reach compliant (Registration, Evaluation, Authorization and Restriction of Chemicals).
Recycled	True
Rohs US	Rohs compliant (Restriction of Hazardous Substances).
Sustainability	Recyclable material, Made from recycled material
Warranty (years)	1

Tests


Abrasion Resistance 1000	2.90g (5000 cycles)
Compression Deflection 1.4	33.3 lb/in ² (at 25%)
Compression Deflection 2.8	33.3 lb/in ² (at 50%)
Fire rating US	Pass
Hardness	67 Shore A
Slip Rating	R9
Coefficient Friction Dry	0.68
Surface Flammability	Pass
Tear Strength	55.4 lb

Technical Specifications

Application	Industrial Environments
Breaking Load	44 lb
Edges	Attachable bevelled edges are available
Material	Natural rubber
Material Group	Natural rubber
Process	Compression Moulding
Temperature Range	- 40 ° C up to + 120 ° C

656S Cushion Ease Solid™ Nitrile

Heavy duty modular rubber tiles

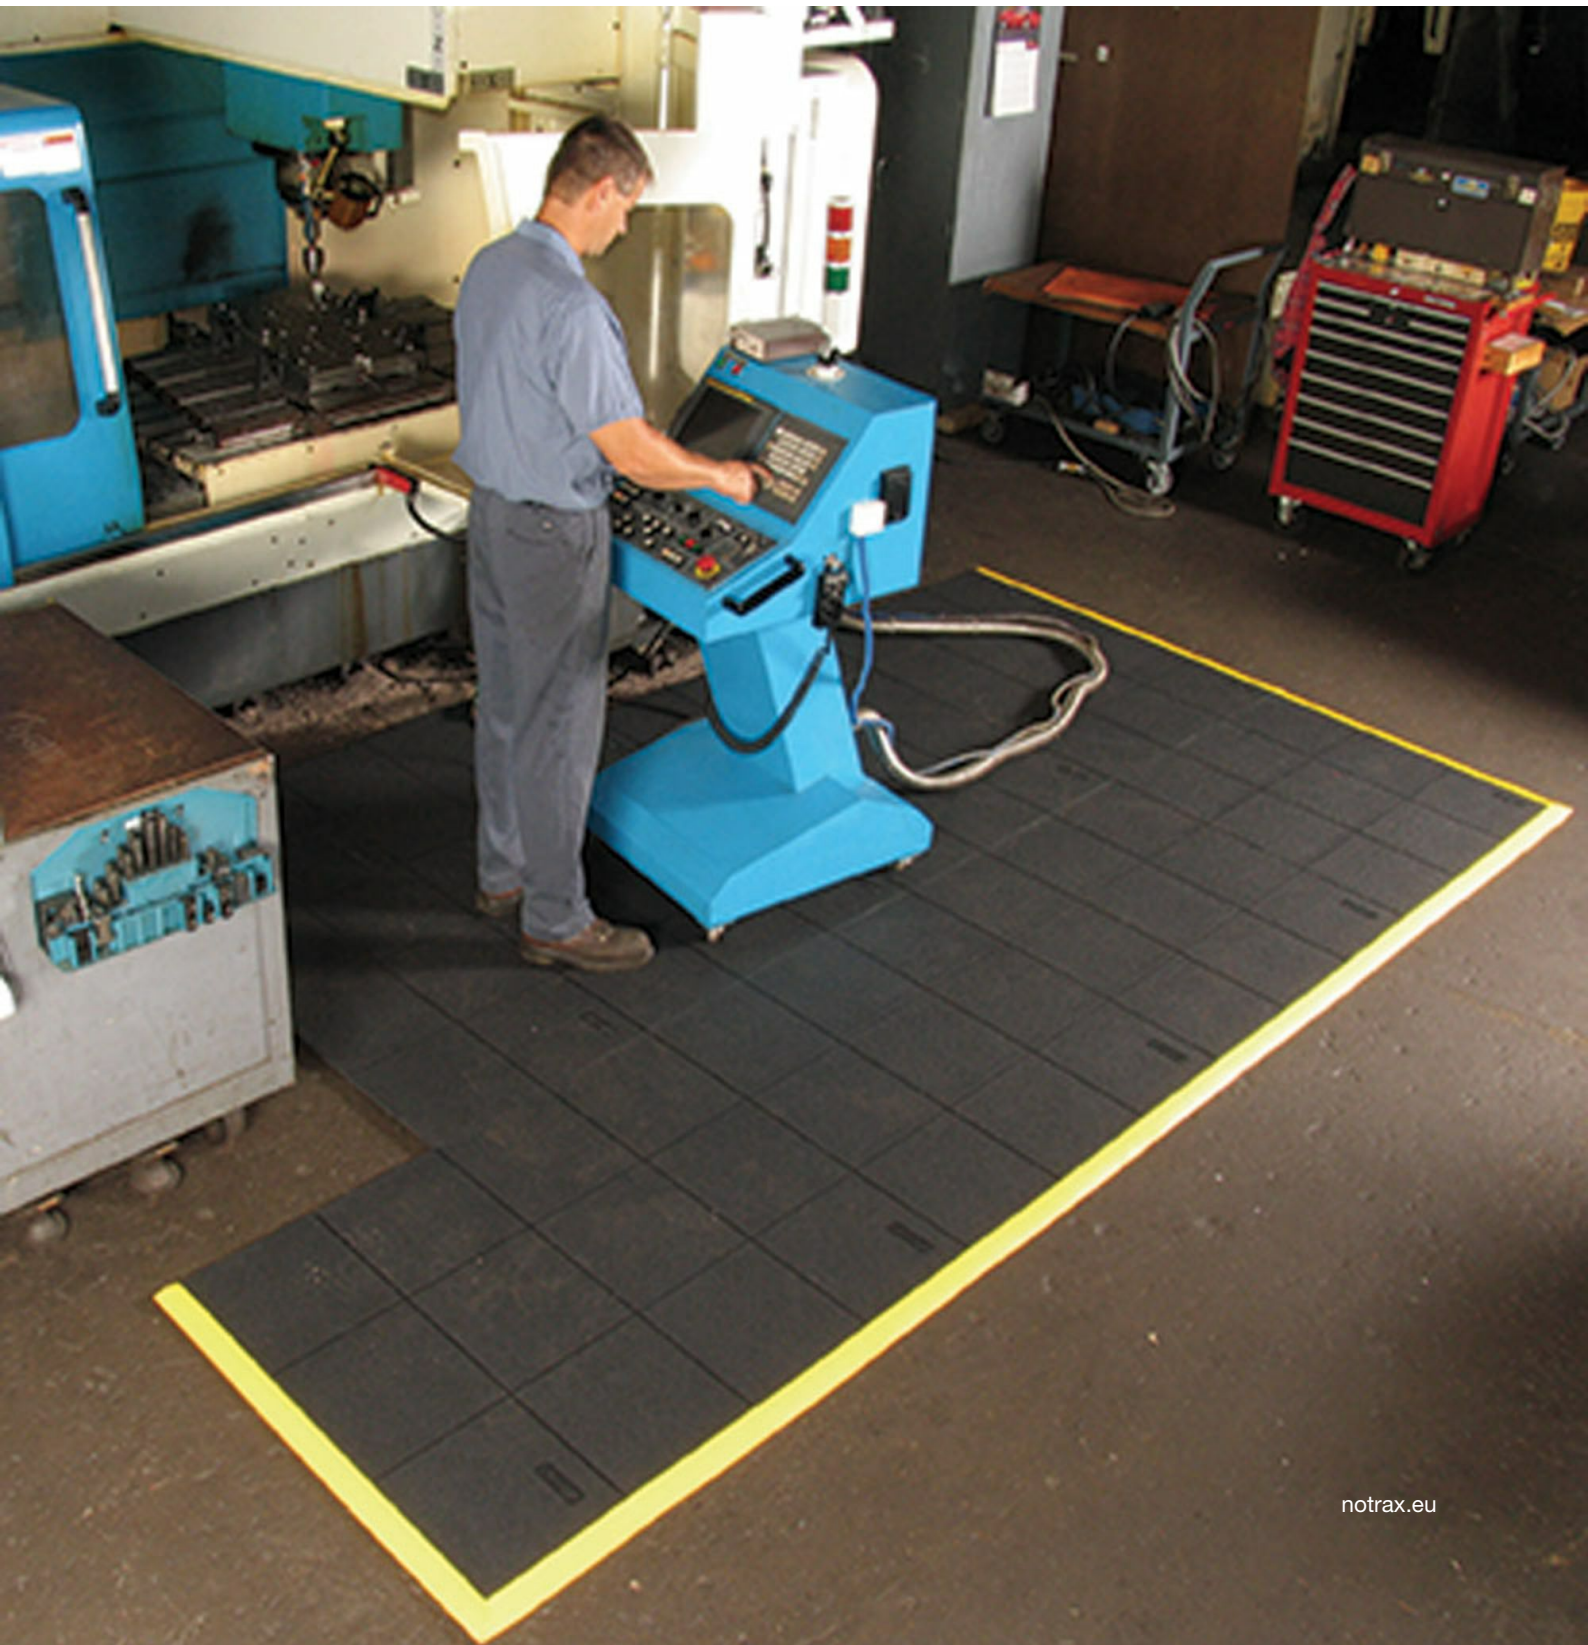

Ergonomic, Anti-fatigue & Safety Matting - Dry Areas Modular Matting 656S Cushion Ease Solid™ Nitrile

Ergonomic benefit derived from a 19 mm thick worker platform with a closed anti-slip pebble structure surface for maximum anti-fatigue comfort in dry industrial environments.

- Heavy duty rubber tiles can be easily assembled for coverage of large areas or individual workstations, wall-to-wall or as islands
- Resistant to most industrial oils
- Compatible with patented MD Ramp System™ for smart safety bevelling solutions; allows outside and inside corners

Recommended use

- Wet/Dry and Oily Areas
- For placement in manufacturing plants, production lines, assembly lines, CNC machines, metal working for individual workstations and custom work platforms
- Heavy duty

Colors:

- Black

Sizes:

- 91cm x 91cm
- per m2

Accessories:

- 552 MD-X Ramp System™ Nitrile
- INS Installation Service Available on Request
- 551 MD Ramp System™ Nitrile



WEAR RESISTANCE

SLIP RESISTANCE

ANTI-FATIGUE

GOOD BETTER BEST



Ergonomic, Anti-fatigue & Safety Matting - Dry Areas Modular Matting Cushion Ease Solid™ Nitrile

General

Brand	Notrax
Category	Dry Areas Modular Matting
Product Number	656S
Product Family	Industrial & Commercial Matting
Product Group	Ergonomic, Anti-fatigue & Safety Matting
Product Name	Cushion Ease Solid™ Nitrile
Recommended use	For placement in manufacturing plants, production lines, assembly lines, CNC machines, metal working for individual workstations and custom work platforms
Series	Cushion-Ease®
Shipping Location	Chicago, IL 60638, United States, Achterzeedijk 57, Unit 15, Barendrecht 2992SB, The Netherlands
Type	Dry Areas - Heavy Duty Modular Rubber Mats
Update trigger	20210310-1301
Usage Intensity	Heavy duty

Sustainability

REACH	Reach compliant (Registration, Evaluation, Authorization and Restriction of Chemicals).
Recycled	True
Rohs US	Rohs compliant (Restriction of Hazardous Substances).
Sustainability	Recyclable material
Warranty (years)	1

Tests

Abrasion Resistance 1000	1.50% weight loss (5000 cycles)
Compression Deflection 1.4	37.0 lb/in ² (at 25%)
Compression Deflection 2.8	98.9 lb/in ² (at 50%)
Fire rating US	Pass
Hardness	64 Shore A
Slip Rating	R9
Coefficient Friction Dry	0.88
Surface Flammability	Pass

Technical Specifications

Application	Industrial Environments
Edges	Attachable bevelled edges are available
Material	100% Nitrile rubber
Material Group	Nitrile rubber
Process	Compression Moulding
Temperature Range	- 40 ° C up to + 120 ° C

856SFR Cushion Ease Solid™ GSII® Nitrile FR

Nitrile FR GSII® modular mat



Ergonomic, Anti-fatigue & Safety Matting - Dry Areas Modular Matting 856SFR Cushion Ease Solid™ GSII® Nitrile FR

Ergonomic benefit derived from a 19 mm thick worker platform with a closed anti-slip pebble structure surface for maximum anti-fatigue comfort in dry industrial environments.

- Heavy duty rubber tiles can be easily assembled for coverage of large areas or individual workstations, wall-to-wall or as islands
- With abrasive Grip Step® coating for extra adherence in extremely slippery areas
- Compatible with patented MD Ramp System™ for smart safety bevelling solutions; allows outside and inside corners
- Resistant to most industrial oils and suitable for welding areas

Recommended use

- Wet/Dry and Oily Areas
- For placement in manufacturing plants, production lines, assembly lines, CNC machines, metal working for individual workstations and custom work platforms
- Heavy duty

Colors:

- Black

Sizes:

- 91cm x 91cm
- per m2

Accessories:

- 552 MD-X Ramp System™ Nitrile
- INS INSTALLATION
- 651 M.D. Fire Retardent Ramp System
- 551 MD Ramp System™ Nitrile



WEAR RESISTANCE

SLIP RESISTANCE

ANTI-FATIGUE

Ergonomic, Anti-fatigue & Safety Matting - Dry Areas Modular Matting Cushion Ease Solid™ GSII® Nitrile FR

General

Brand	Notrax
Category	Dry Areas Modular Matting
Product Number	856SFR
Product Family	Industrial & Commercial Matting
Product Group	Ergonomic, Anti-fatigue & Safety Matting
Product Name	Cushion Ease Solid™ GSII® Nitrile FR
Recommended use	For placement in manufacturing plants, production lines, assembly lines, CNC machines, metal working for individual workstations and custom work platforms
Series	Cushion-Ease®
Shipping Location	Barendrecht 2992SB, The Netherlands, Chicago, IL 60638, United States
Type	Dry Areas - Heavy Duty Modular Rubber Mats
Update trigger	20210310-1301
Usage Intensity	Heavy duty

Sustainability

REACH	Reach compliant (Registration, Evaluation, Authorization and Restriction of Chemicals).
Reach US	Not REACH Compliant
Rohs US	Rohs compliant (Restriction of Hazardous Substances).
Sustainability	Recyclable material
Warranty	1

Tests

Abrasion Resistance 1000	2.3% (5000 cycles)
Fire rating EU	EN 13501-1 Bfl-S1
Fire rating US	Pass
Slip Rating	R10
Coefficient Friction Dry	0.86
Surface Flammability	Pass

Technical Specifications

Application	Industrial Environments
Edges	Attachable bevelled edges are available
Material	100% nitrile fire retardant rubber compound
Material Group	Nitrile rubber
Process	Compression Moulding

656SFR Cushion Ease Solid™ Nitrile FR

Heavy duty modular rubber tiles



Ergonomic, Anti-fatigue & Safety Matting - Dry Areas Modular Matting 656SFR Cushion Ease Solid™ Nitrile FR

Ergonomic benefit derived from a 19 mm thick worker platform with a closed anti-slip pebble structure surface for maximum anti-fatigue comfort in dry industrial environments.

- Heavy duty rubber tiles can be easily assembled for coverage of large areas or individual workstations, wall-to-wall or as islands
- Resistant to most industrial oils and suitable for welding areas
- Compatible with patented MD Ramp System™ for smart safety bevelling solutions; allows outside and inside corners.

Recommended use

- Wet/Dry and Oily Areas
- For placement in manufacturing plants, production lines, assembly lines, CNC machines, metal working for individual workstations and custom work platforms
- Heavy duty

Colors:

- Black

Sizes:

- 91cm x 91cm
- per m2

Accessories:

- 551 MD Ramp System™ Nitrile
- 552 MD-X Ramp System™ Nitrile



ANTI-FATIGUE

SLIP RESISTANCE

WEAR RESISTANCE

GOOD BETTER BEST

Ergonomic, Anti-fatigue & Safety Matting - Dry Areas Modular Matting Cushion Ease Solid™ Nitrile FR

General

Brand	Notrax®
Category	Dry Areas Modular Matting
Product Number	656SFR
Product Family	Industrial & Commercial Matting
Product Group	Ergonomic, Anti-fatigue & Safety Matting
Product Name	Cushion Ease Solid™ Nitrile FR
Recommended use	For placement in manufacturing plants, production lines, assembly lines, CNC machines, metal working for individual workstations and custom work platforms
Series	Cushion-Ease®
Shipping Location	Chicago, IL 60638, Barendrecht 2992SB, The Netherlands
Type	Dry Areas - Heavy Duty Modular Rubber Mats
Usage Intensity	Heavy duty

Sustainability

Reach	Reach compliant (Registration, Evaluation, Authorization and Restriction of Chemicals).
Sustainability	Recyclable material
Warranty	7

Tests

Abrasion Resistance 1000	1.50% weight loss @ 5000 cycles
Compression Deflection 1.4	37.0 lb/in ²
Compression Deflection 2.8	98.9 lb/in ²
Elongation	451.8%
Fire rating EU	EN 13501-1 Bfl-S1
Fire rating US	Pass
Hardness	50 Shore A
Coefficient Friction Dry	0.88
Surface Flammability	Pass

Technical Specifications

Application	Industrial Environments
Edges	Attachable bevelled edges are available
Material	100% nitrile fire retardant rubber compound
Material Group	Nitrile rubber
Process	Compression Moulding