


Zipper[®] | Zero

Modular system to segregate traffic flows.

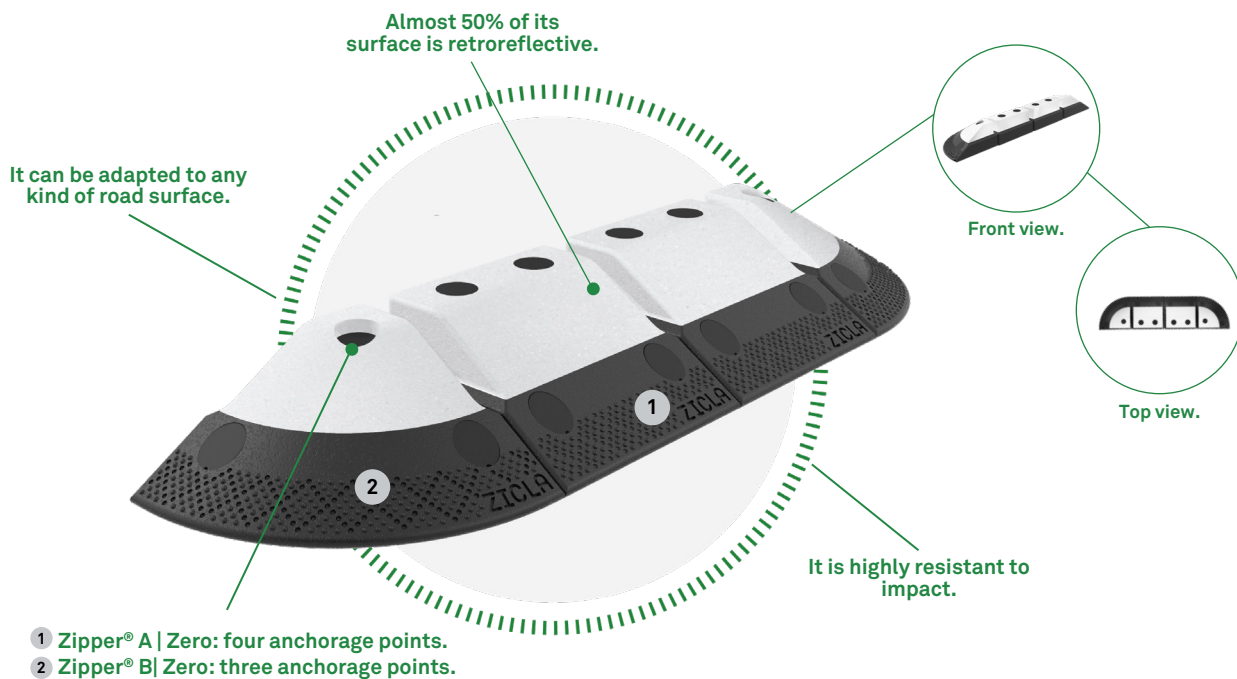

1 Zipper[®] A | Zero

w: 280 mm
l: 280 mm
h: 125 mm

3,86 kg
3,33 kg of CO₂ equiv/u




2 Zipper[®] B | Zero

w: 280 mm
l: 280 mm
h: 125 mm

2,48 kg
2,14 kg of CO₂ equiv/u




Zipper® configurations.

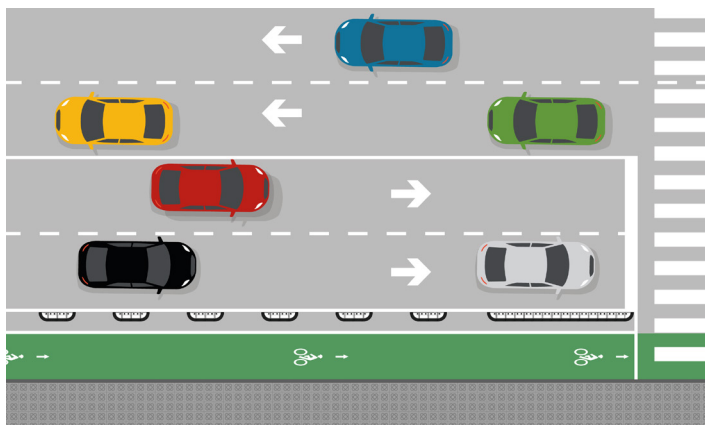


BAAB CONFIGURATION

A: 1120 mm (recommended distance between sets).

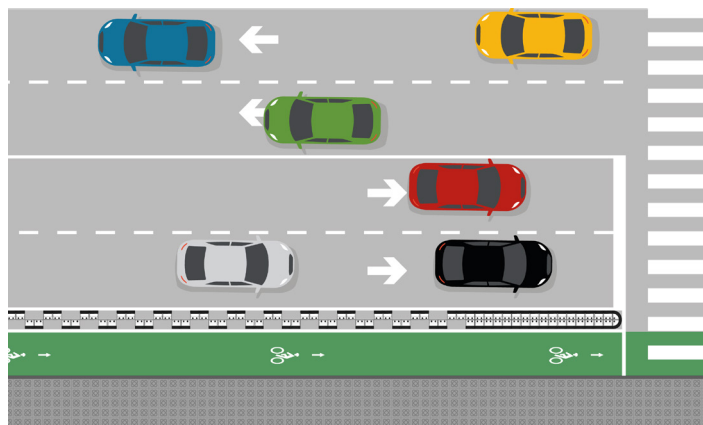


AA CONFIGURATION

A: 560 mm (recommended distance between sets).

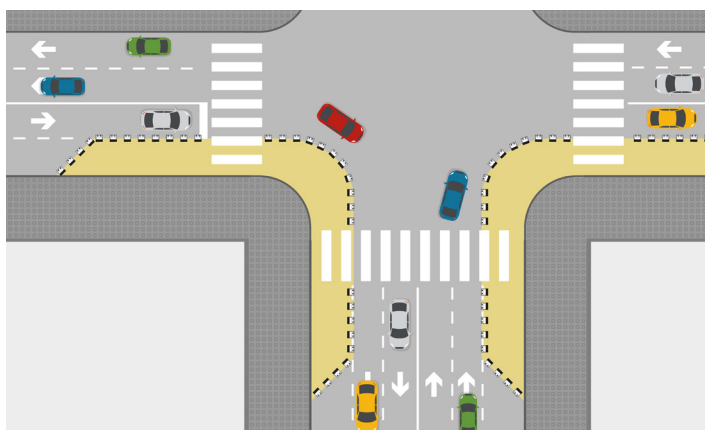

WIDENING OF THE SIDEWALKS AND NARROWING OF THE STREET AT INTERSECTIONS

Easily creates safe intersections.

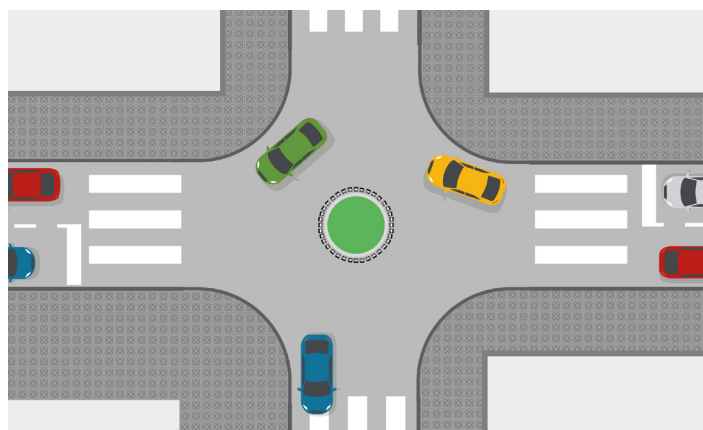

MINI ROUNDABOUT

Builds roundabouts quickly for safe intersections.

Surface painting customisation.

Zipper® A | Zero

Available colors



Zipper® B | Zero

Available colors



Made in.
EU

1st year of
production.
2020

Awards.
Finalist



PREMI
CATALUNYA
D'ECODISSENY
2017

Certificates.

“Design for all,
good practice”



Ecolabels.

DGQA



Blue Angel of
the material



Design registration.

Ohim
003654680-0001/0002

China
201730280266-0
201730280265-5

United States Copyright
VA 2-125-281

United States Design Patent
US D842,683 S
US D854,956